


Notes: Unless otherwise specified  
 Cut length  $\pm 3\text{mm}$   
 Ferrule strip length  $\pm 0.5\text{mm}$   
 Power connector strip length  $\pm 0.5\text{mm}$

(1x) **EL-MS0604**  
 Molex MegaFit Conn  
 (1x) **EL-MS0606** TPA Lock  
 (2x) **EL-MS0607**  
 Molex MegaFit Terms



2x [EL-WR0123] – 16awg White Wire  
 Length = 300mm

Strip 4.9mm

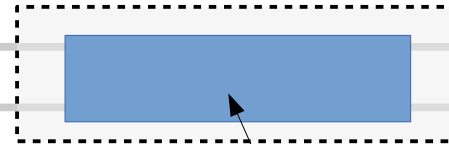

30mm ferrite to  
 terminal block

1x [PC-CN0032]  
 Term Block Plug 2POS STR 5.08MM



Strip 8mm

2x [EL-MS0361] 16 AWG 6.0mm  
 Pin Length Power Phase Black  
 Single Wire - Insulated Ferrule

1x [EL-MS0356]  
 Heat Shrink Tubing  
 Length = 55mm

1x [EL-MS0332]  
 Ferrite Cable Cores  
 220ohms 100MHz 5mm I.D.

Rev	Date	Changes	Change by
A	1/7/19	Add ferrite and heat shrink tube	JW
B	1/30/19	Add strip tolerance	JW
C	4/17/19	Specify ferrite core location	KJ
D	3/13/24	Change from Anderson to Megafit	rjc

DRAWN BY		DATE
West		
CHECKED BY		DATE

EL-HR0148

**FAME 3D**



TITLE  
**CB Bed Power Harness, Assembled**

FILE NAME EL-HR0148_CB_Bed_Power_Harness.odg	SHEET 1	REV. D
---	------------	-----------